

CL6700


DVI LCD Console

The CL6700 DVI LCD Console is a KVM control unit featuring an integrated 19" DVI LCD panel, a full keyboard, and a touch pad in a 1U rack-mountable sliding housing with audio support. The CL6700 serves as the front end sliding console for compatible DVI KVM switches. This means users who already have a compatible KVM switch can take advantage of the space saving and efficiency benefits of the sliding console module without having to purchase a KVM switch module.

For added convenience, a port for an external USB mouse is provided on the unit's front panel, while ports for an extra console (USB mouse, USB keyboard, DVI monitor and VGA monitor) for a second user are provided on the rear panel.



Setup

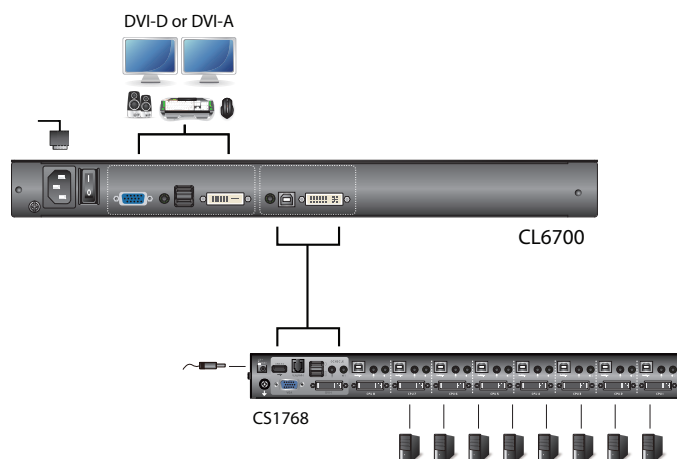

Features

- Integrated KVM console with a 19" DVI LCD monitor in a single rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Standard rack mount kit included – optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Supports an external console with USB / DVI / VGA connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as USB peripheral port)
- Audio support (speakers)
- Superior video quality – up to 1280 x 1024 @75 Hz; DDC, DDC2, DDC2B
- Standard 105-key keyboard; Sun keyboard emulation
- Multiplatform support – Windows, Linux, Mac, and Sun
- Compatible with most ATEN DVI KVM Switches
- Adjustable depth to fit within the rack
- Firmware upgradeable
- Console lock – enables the console drawer to remain securely locked away in position when not in use
- DDC emulation – video settings of each computer are automatically adjusted for optimal output to the monitor

Specifications

Function		CL6700
Computer Connections		1
Console Selection		Hotkey
Connectors	External Console Ports	Keyboard 1 x USB Type A Female (White)
		Mouse 1 x USB Type A Female (White)
		Monitor 1 1 x DVI-D Female (White)
		Monitor 2 1 x HDB-15 Female (Blue)
		Speaker 1 x Mini Stereo Jack Female (Green)
	KVM Ports	KB / Mouse 1 x USB Type B Female (White)
		Monitor 1 x DVI-I Female (White)
		Speaker 1 x Mini Stereo Jack Female (Green)
	External Mouse / Peripheral 1 x USB Type A Female (Black)	
	Power 1 x 3-prong AC Socket	
Switches	Reset 1 x Semi-recessed Pushbutton	
	Power 1 x Rocker	
	FW Upgrade 1 x Slide	
	LCD Power 1 x Pushbutton	
	LCD Adjustment 4 x Pushbutton	
LEDs	Lock	Power 1 (Green)
		Num 1 (Green)
		Caps 1 (Green)
		Scroll 1 (Green)
Emulation	Keyboard / Mouse PS/2; USB	
Video		1280 x 1024@75Hz, DDC2B
I/P Rating		100–240VAC; 50–60Hz; 1A
Power Consumption		120V, 24.6W / 230V, 25.4W
Environment	Operating Temp. 0–50°C	
	Storage Temp. –20–60°C	
	Humidity 0–80% RH Non-condensing	
Physical Properties	Housing Metal	
	Weight 13.09 kg	
	Dimensions (L x W x H) 58.92 x 48.00 x 4.40 cm	

* Product specifications and appearance are subject to change without notice.

Headquarters

ATEN International Co., Ltd.
3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Tel: 886-2-8692-6789 Fax: 886-2-8692-6767 E-mail: marketing@aten.com