


2 Port PS/2 KVM Switch



Diagram

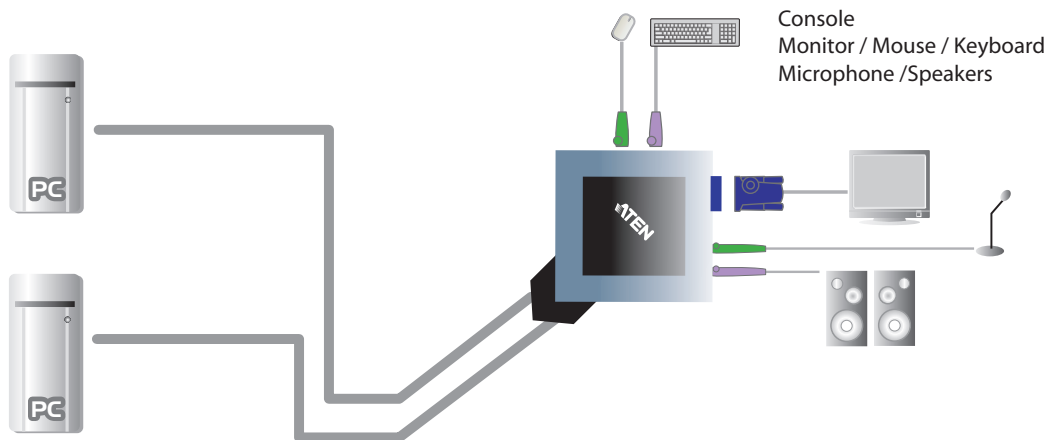

Model: CS-62B

Features

- Controls 2 computers from 1 video monitor, PS/2 Keyboard and PS/2 mouse
- With speaker and microphone support
- Built in 6' cables
- Superior video quality- up to 2048 x 1536; DDC2B
- Supports Microsoft Intellimouse and the scrolling wheel on most mice
- Independent switching for speaker and microphone
- Auto scanning
- Easy Management

Specifications

| | | | |
|-------------------------|-------------------------------------|----------|--|
| Function | CS-62B | | |
| Computer Connections | 2 | | |
| Computer Port Selection | Hotkeys | | |
| Connectors | Console | Keyboard | 1 x Mini-Din-6 Female (Purple) |
| | | Video | 1 x HDB-15 Female (Blue) |
| | | Mouse | 1 x Mini-Din-6 Female (Green) |
| | | Audio | 1 x Stereo Earphone Jack Female (Green) 1 x Microphone Jack Female (Pink) |
| | | Computer | Keyboard |
| | Video | | 2 x HDB-15 Male (Blue) |
| | Mouse | | 2 x Mini-Din-6 Male (Green) |
| | Audio | | 2 x Stereo Earphone Plugs Male (Green) 2 x Microphone Plugs Male (Pink) |
| | LEDs | | Selected |
| | Keyboard / Mouse Emulation | PS/2 | |
| VGA Resolution | 2048 x 1536; DDC2B | | |
| Scan Interval | 3, 5, 10, 20 Seconds | | |
| Operation Temperature | 0~50°C(0~80% RH, Noncondensing) | | |
| Storage Temperature | -20°C~60°C(0~80% RH, Noncondensing) | | |
| Housing | Plastic | | |
| Weight | 400g | | |
| Dimension | 74.4 X 74.4 X 23.2 mm | | |