


Dura-Link KVM Switch

2 Port KVM Switch

Control 2 computers from a single PS/2 console



(Front)

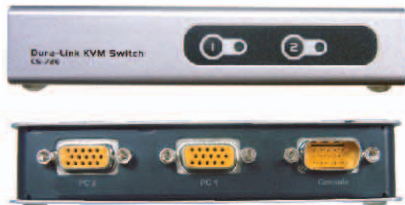

(Back)

Connection & Application

The CS-72A is a cinch to install - there's no software required. Simply connect the supplied CS custom KVM cables to the computers and you're ready to go to work!

Diagram



Model: **CS-72E**

Features

- One console controls two computers – Non-powered
- Logical connector layout – SPHD-15 connectors at rear panel for PC and console connections
- Supports Microsoft IntelliMouse and the scrolling wheel on most mice
- Easy to install – No software required – connecting cables to the computers is all it takes
- Easy to operate – Computer selection via push button switches and hotkeys – auto scan function to monitor computer operation
- Power on detection – automatically switching to the first powered on port
- Auto scan function to monitor computer operation
- LED display for easy status monitoring
- Caps Lock, Num Lock, and Scroll Lock states are saved and restored when switching
- Hot pluggable – add or remove computers for easy maintenance
- Keyboard and mouse emulation – computers boot even when the console focus is elsewhere
- Superior video quality – supports resolution of up to 2048 x 1536; DDC2B

Specifications:

Function	Specification	
PC Connection	2	
PC selection	Push Button Switches, Hotkeys	
Connectors	Computer	2 x SPHD-15 F (Yellow)
	Console	1 x SPHD-15 M (Yellow)
Push Button Switches	2 x Round, Transparent @ Front	
LEDs	2 x Green @ Front	
Keyboard / Mouse Emulation	PS/2	
Scan Interval	5 seconds	
Power Consumption	DC 9V, 0.9W (spare)	
Resolution	2048 x 1536, DDC2B	
Operation Temperature	0° ~ 50° C	
Storage Temperature	-20° ~ 60° C	
Humidity	0 ~ 80% RH, NC	
Enclosure	Metal	
Weight	? g	
Dimension	125 x 80 x 25 mm	