



X117-1201D KVM integration

**1920 x 1200
WUXGA**

FC CE

Drawer Features & Display Benefits

- ▶ 1U 17" widescreen LCD KVM drawer
- ▶ 12-port DVI-D + audio KVM switch
- ▶ 1920 x 1200 native **WUXGA** Ultra high resolution
- ▶ Support **Full HD** with 1080p resolution
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ SUN Micro or MAC keyboard options available
- ▶ New enhanced aesthetics with molded front handle
- ▶ 2 post rack mounting available

Option ● 48V, 24V or 12VDC power

Specifications

• LCD Panel

| | |
|------------------------|----------------------|
| Size (diagonal) : | 17.1" widescreen TFT |
| Max resolution : | 1920 x 1200 |
| Brightness (cd/m2) : | 210 |
| Backlight : | LED |
| Colors : | 16.7 M, 8-bit |
| Contrast ratio (typ) : | 600 : 1 |
| Viewing angle (H/V) : | 130° x 110° |
| Active area (mm) : | 367 x 230 |
| MTBF (hrs) : | 20,000 |
| Signal input : | DVI-D |

• Weight

| | |
|---------|-----------------|
| Net : | 16 kgs / 35 lbs |
| Gross : | 21 kgs / 46 lbs |

• Casing Color :

Black (RAL 9005)

• Dimensions

| | |
|-----------|---|
| Product : | 442 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch |
| Packing : | 590 x 753 x 120 mm / 23.2 x 29.6 x 4.7 inch |

• Power

| | |
|---------------|---------------------------------------|
| Input : | Auto-sensing 100 to 240VAC, 50 / 60Hz |
| Consumption : | Max. 48 Watt, Standby 5 Watt |

• Environmental

| | |
|---------------------|-------------------------------------|
| Operating : | 0 to 50°C Degree |
| Storage : | -5 to 60°C Degree |
| Relative humidity : | 5~90%, non-condensing |
| Shock : | 10G acceleration (11 ms duration) |
| Vibration : | 5~500Hz 1G RMS random vibration |

• Regulatory :

FCC, CE

DVI KVM



| | |
|------------------|---------------------------------|
| KVM port : | 12 x DVI-D + USB 3.0 connectors |
| Audio out port : | 1 x 3.5mm analog stereo |

Server Support

| | |
|--------------------|--------------------------------------|
| Video : | DVI-D single link, up to 1920 x 1200 |
| Keyboard / Mouse : | USB type A, USB 1.1 |
| Audio : | 3.5mm analog stereo, 22 KHz |



KVM Switching : via keyboard hotkeys

Connectivity : Combo 4-in-1 DVI KVM cable


DVI KVM Cable : CI-6, 6 feet DVI KVM cable
CI-15, 15 feet DVI KVM cable
(Server end : DVI-D + USB + Audio)
(KVM port : DVI-D + USB 3.0)

Keyboard

Ge G keyboard integrated with touchpad

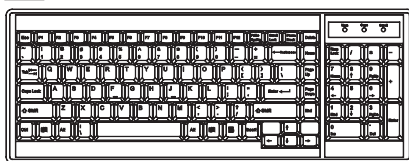

Gb G keyboard integrated with trackball

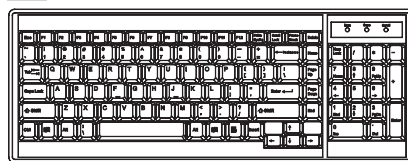

Supporting layouts

| | | |
|---------|--|----------------|
| America | | United States |
| EMEA | | United Kingdom |
| | | Germany |
| | | France |
| | | Spain |
| | | Norway |
| | | Italy |
| | | Russia |
| | | Switzerland |
| | | Netherlands |
| | | Portugal |
| Asia | | China |
| | | Japan |
| | | Korea |
| | | Arabia |
| | | Turkey |