

master view™


# 4 Port USB 2.0 KVM Switch

With USB 2.0 Hub and 5 port Ethernet Hub

**Network  
Enabled**



Diagram

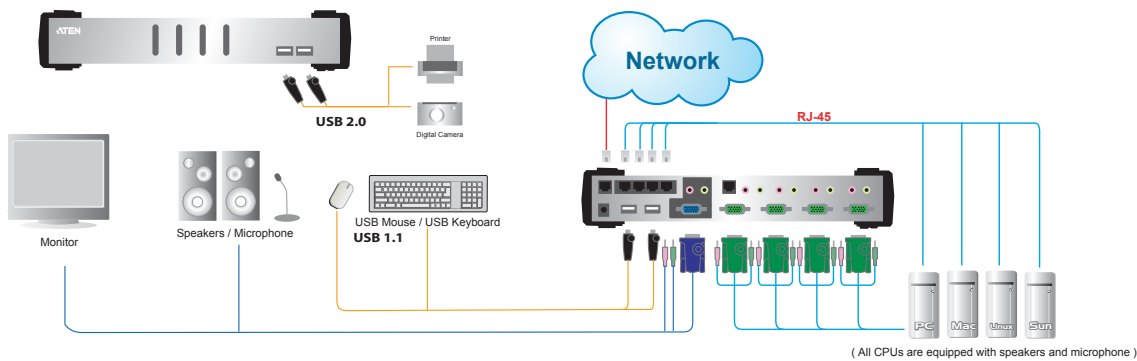

## Model: CS-1772 / CS-1774

### Features

- Complete USB 2.0 KVM Switch with Ethernet Hub/USB Hub
- Two/Four auto-sensing dual speed ports (Ethernet/Fast Ethernet) plug-and-play enabled; hub complies with IEEE802.3/IEEE802.3u Standard
- Supports Multiple platforms: PC, Mac, Sun
- 2 port USB 2.0 Hub built in
- Buzzer ON/OFF via hotkey
- Permits independent switching of KVM, USB and audio focus between all computers
- Audio enabled

### Specifications

Function	CS-1772	CS-1774
Computer Connections	2	4
Computer	KVM	Hotkeys, Push Buttons
Port selection	USB or Audio	Hotkeys
Connectors	Console	Keyboard 1 x USB Type-A Female (White) Video 1 x HD-15 Female (Blue) Mouse 1 x USB Type-A Female (White) Speaker 1 x Audio Jack Female (Green) Microphone 1 x Audio Jack Female (Pink)
Computers	Keyboard Video Mouse Speaker Microphone	4 x SPHD-15 Female (Green) 4 x Audio Jack Female (Green) 4 x Audio Jack Female (Pink)
Ethernet Hub	3 x RJ-45 Female (Black)	5 x RJ-45 Female (Black)
Peripheral	2 x USB Type-A Female (White)	
Firmware Upgrade	1 x RJ-11 Female (Black)	
LEDs	KVM 2 (Orange) USB or Audio 2 (Green) 10/100 Mbps 3 (Green) LINK 3 (Green)	4 (Orange) 4 (Green) 5 (Green) 5 (Green)
Keyboard / Mouse Emulation	USB (PC, Mac, Sun)	
Scan Interval	1-99 seconds	
Power Adapter	1 x D/C 5.3V/2.4A	
Power Consumption	DC 5.3V, 4.5W; 900mA	DC 5.3V, 5W; 1000mA
Resolution	2048 x 1536, DDC2B	
Operation Temperature	0 C~ 50 C	
Storage Temperature	-20 C~ 60 C	
Humidity	0 ~ 80% RH, NC	
Weight	710g	920g
Dimension	210 x 88 x 55.5mm	270 x 88 x 55.5mm



### ATEN INTERNATIONAL CO., LTD.

3F, NO. 125, Sec. 2, Datung Rd., Shijr City, Taipei, Taiwan 221 TEL : 886-2-8692-6789 FAX : 886-2-8692-6767 www.aten.com sales@aten.com

© Copyright 2005 ATEN® International Co., Ltd. All brand names and trademarks are the registered property of their respective owners.

www.aten.com